

AUDIO LABS®

"PASSION FOR MUSIC"



SPL MONSTER 12



WWW.PROTECH.COM.MX


Congratulation! Thank you for choosing Audio labs. We are proud to introduce these exciting new lines of outstanding performance products. Our engineering team utilizes innovative technology to bring you the absolute best performance, sound quality, reliability and value.

Warning: Audiolabs speakers are capable of producing sound levels that can permanently damage your hearing! Turning up a system to a level that has audible distortion is more damaging to your ears than listening to an un-distorted system at the same volume level. The threshold of pain is indicator that the sound level is too loud and may damage your hearing. please use common sense when controlling volume.

Thiele Small Parameters


Model	SPL MONSTER 12
Vas(Ltr)	22.139
Fo(Hz)	33.696
Qms	5.641
Qes	0.515
Qts	0.472
BL(T/M)	28.019
Spl(dB)	85
Cms(uM/N)	70.152
Mms(g)	318.003

Mounting Size

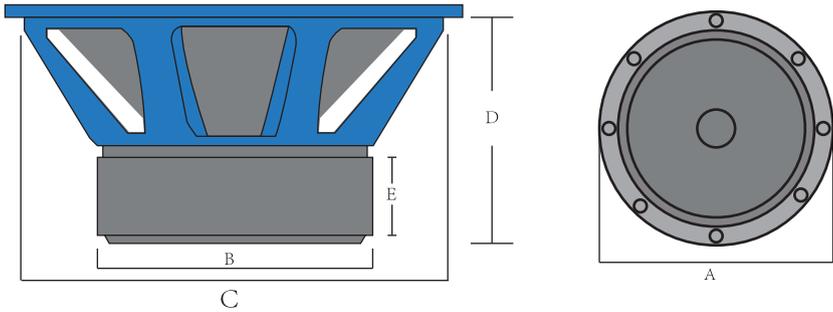

Model	A	B	C	D	E
SPL MONSTER 12	327 mm	190 mm	292 mm	175 mm	50 mm


Ported Enclosure(Inner size)

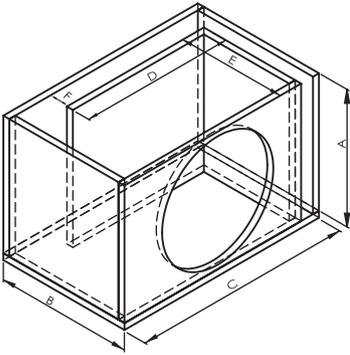

Model	A	B	C	D+E	F
SPL MONSTER 12	310 mm	340 mm	450 mm	600 mm	30 mm

Sealed Enclosure(Inner size)


Model	A	B	C
SPL MONSTER 12	330 mm	330mm	450 mm

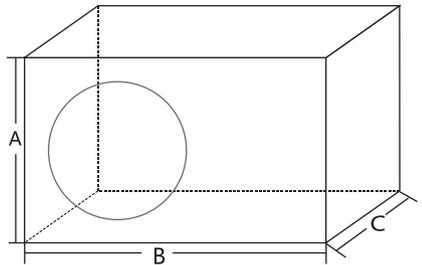


Ps:The above dimensions are recommended for your reference

Wire Connection


Two 1 ohm DVC Speakers= 1 ohm load

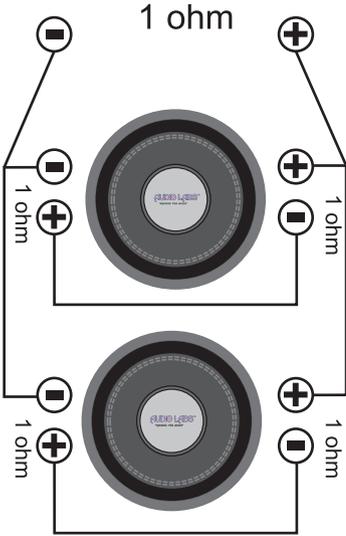


Two 1 ohm DVC Speakers= 0.25 ohm load

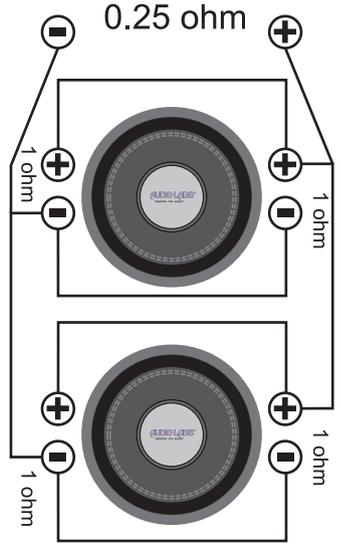

Two 2 ohm DVC Speakers= 0.5 ohm load

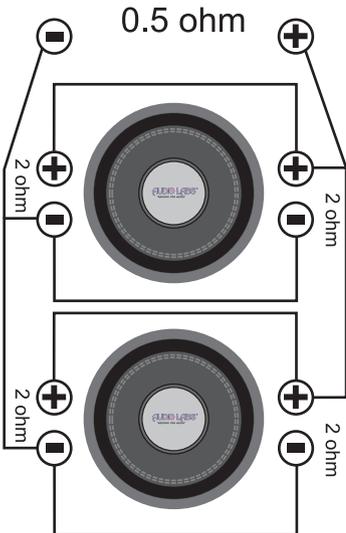


Two 2 ohm DVC Speakers= 2 ohm load

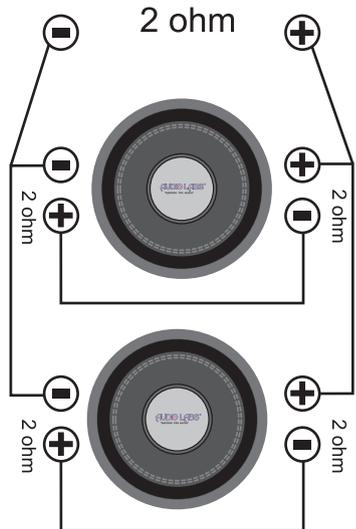


Wire Connection


One 1 ohm DVC Speakers= 2 ohm load

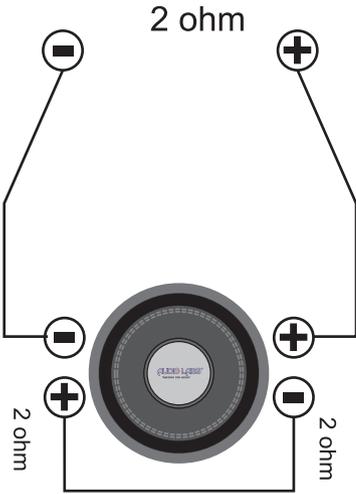


One 1 ohm DVC Speakers= 0.5 ohm load

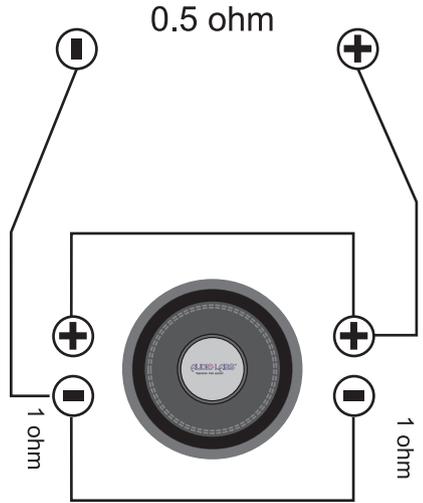

One 2 ohm DVC Speakers= 4 ohm load

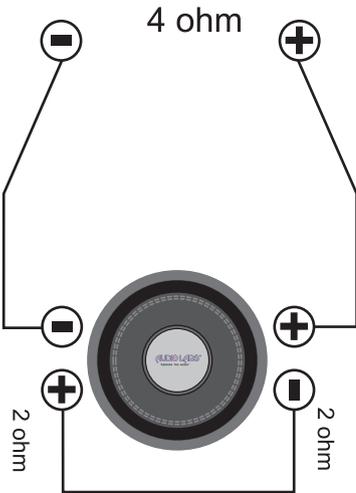


One 2 ohm DVC Speakers= 1 ohm load

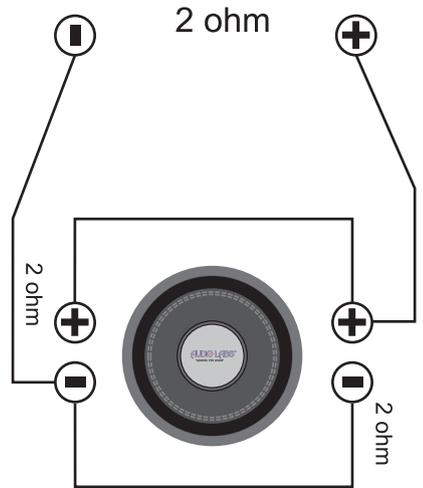


Wire Connection


Two 4 ohm DVC Speakers= 4 ohm load

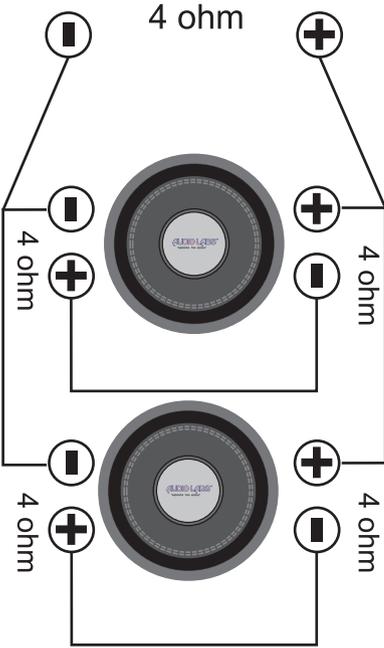


Two 4 ohm DVC Speakers= 1 ohm load

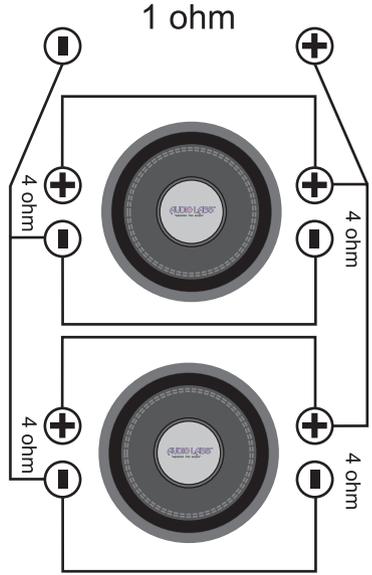


One 4 ohm DVC Speakers= 2 ohm load

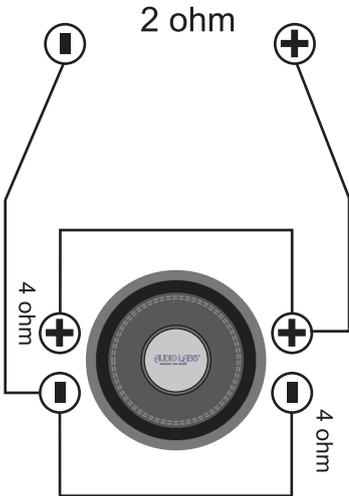

One 4 ohm DVC Speakers= 8 ohm load

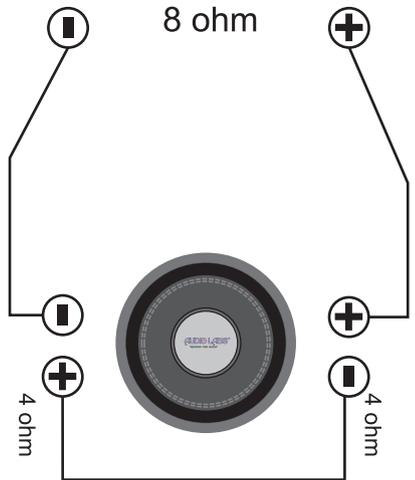

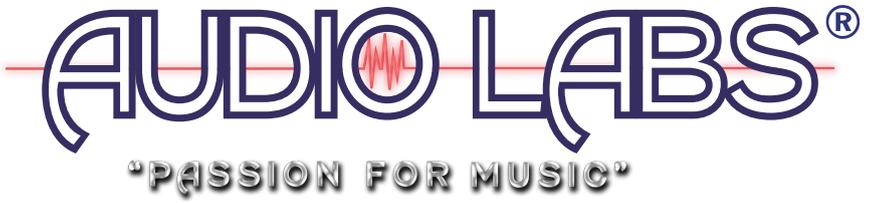

WWW.PROTECH.COM.MX